

P133 Pressure Regulator

- Suitable for Monitoring
- Balanced Supply Valve
- Wide Pressure Range Offering

The P133 is a direct operated pressure reducing regulator used in commercial and industrial applications such as furnace and burners where accuracy and sensitivity is critical. The regulator utilizes a balanced diaphragm design that provides for the sensitivity and accuracy. This minimizes the effects of supply pressure variation on output pressure. The P133 is available in a low pressure or high pressure models and a broad range of outlet spring ranges. The P133 is also suitable in pressure monitoring applications.

Applications

- Industrial and Commercial Gas Regulation
- Compressors
- Gas Engines
- Natural Gas and Propane Applications



Materials of Construction

Adjusting Screw	Aluminum or Brass
Body	Ductile Cast Iron or WCB Steel
Bonnet	Aluminum
Cage	Aluminum
Diaphragm	Nitrile or Fluorocarbon
Housing	Aluminum
Molded Seat Assembly	Nitrile or Fluorocarbon
Orifice	Aluminum

P133 Wide Open Flow Coefficients

Capacity	Wide Open C_v for Relief Valve Sizing	Representative C_1
25% ⁽¹⁾	490	28.2
40% ⁽¹⁾	760	29.1
60% ⁽¹⁾	1150	31.8
100%	1800	35.0

1. Using optional restriction collar.

Specifications


	133L	133H
Maximum Operating Inlet	60 PSIG	60 PSIG
Maximum Emergency Inlet	125 PSIG	125 PSIG
Maximum Operating Outlet	2 PSIG	10 PSIG
Maximum Emergency Outlet	15 PSIG	15 PSIG
Maximum Over Outlet Pressure	3 PSIG	3 PSIG
Pressure Ranges	See Table 2	
Port Sizes	2 NPT	
Restrictor Collars	25%	
	40%	
	60%	
End Connections	2" NPT (Standard)	
	125 FF Flange (Iron Only)	
	150 RF Flange (Steel Only)	
Temperature Range	-40° F to 200° F	
	-40° C to 93° C	
Approx Weight	35 lbs. (15.9 kg)	

P133 Series Range Springs

Model	Spring Ranges		Spring Color	Part Number
	W.C. or PSI	Bar		
P133 L & H	2" - 4" W.C.	0.005 - 0.01	Brown	655-697-002
	3.5" - 6" W.C.	0.009 - 0.015	Red	655-697-003
	5" - 9" W.C.	0.012 - 0.022	Black	655-697-004
	8.5" - 18" W.C.	0.021 - 0.045	White	655-697-005
	14" - 28" W.C.	0.035 - 0.07	Green	655-697-006
	0.75 - 2 PSI	0.005 - 0.138	Dark Blue	655-697-007
P133 H Version Only	1.5 - 3.25 PSI	0.103 - 0.224	Orange	655-697-008
	2 - 5 PSI	0.138 - 0.345	Yellow	655-730-000
	5 - 10 PSI	0.345 - 0.689	Blue Stripe	655-659-004


P133 Port Orientation

PORT ORIENTATION (ORDERING MATRIX DIGIT "12")

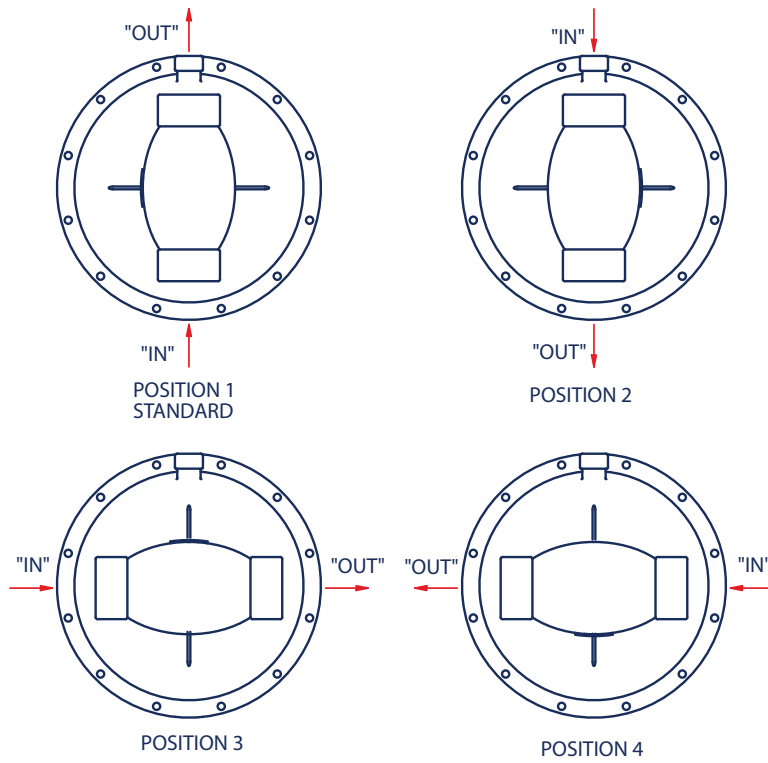



P133 Bonnet Vent Orientation

BONNET VENT ORIENTATION (ORDERING MATRIX DIGIT "13")

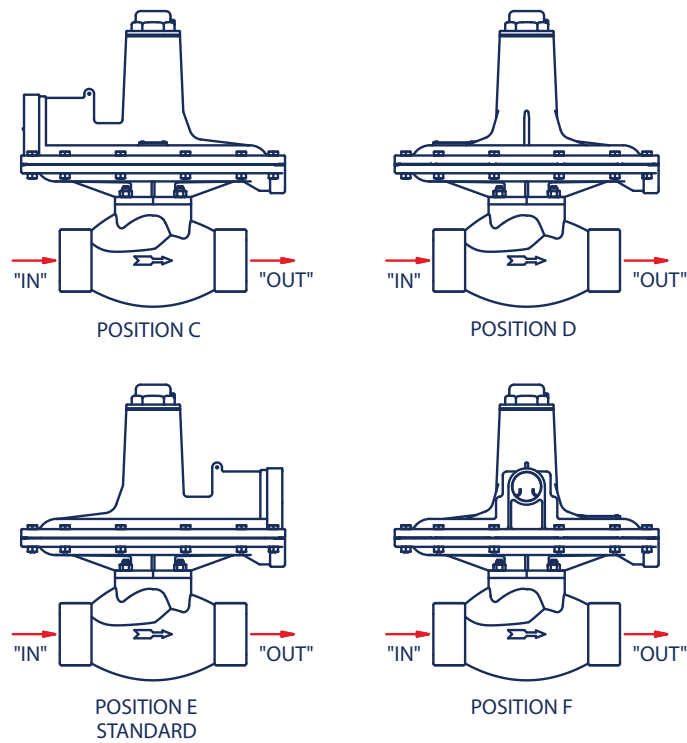

P133 Parts Drawing


P133

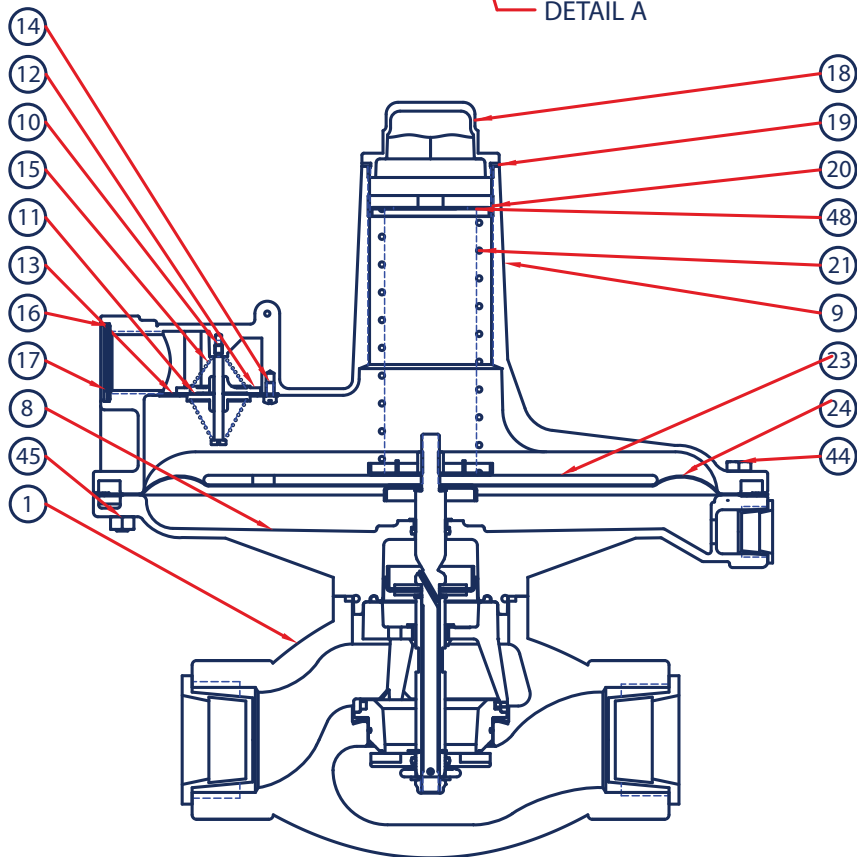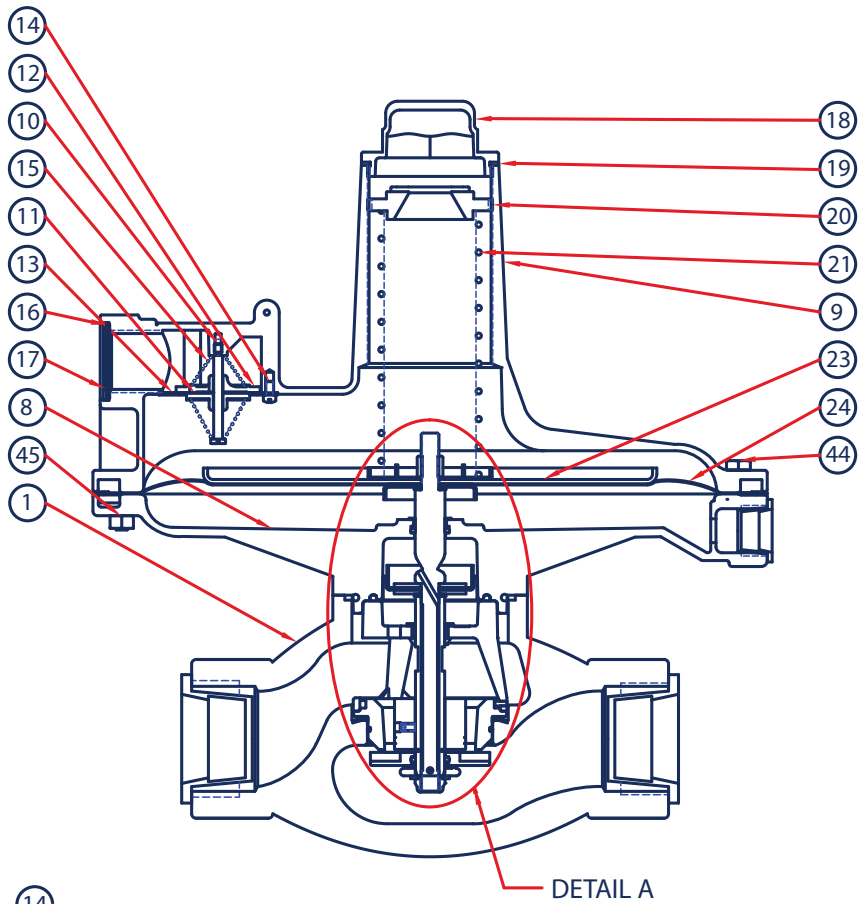

P133 Parts List

Item	Description	Qty.	Part Number
1	Bodies	1	
	Iron - 2" NPT		664-363-000
	Steel - 2" NPT		664-361-000
2	Orifice - Aluminum	1	688-054-001
3	Belleville Washer	1	662-235-000
4	O-ring - Nitrile	1	649-317-000
	O-ring - Fluorocarbon		649-317-001
5	Cage Assembly - Aluminum	1	839-002-000
7	Stem Bearing	1	602-126-000
8	Lower Diaphragm Casing	1	629-230-000
9	Upper Spring Casing	1	604-230-000
	Vent Assembly Parts		
10	Flapper Stem	1	661-008-000
11	Lower Flapper	1	661-009-000
12	Upper Flapper	1	661-010-000
13	Seat Ring	1	650-136-000
14	Self-tapping Screw	3	648-502-000
15	Vent Port Spring	2	655-697-000
16	Screen	1	647-018-000
17	Snap Ring	1	693-021-000
18	Closing Cap	1	610-058-000
19	Closing Cap Gasket	1	624-068-000
20	Adjustment Screw - Low Pressure	1	648-504-000
	Adjustment Screw - High Pressure		648-536-000
21	Range Springs - Low & High Pressure	1	
	2" to 4" WC, Brown, Plated Steel		655-697-002
	3.5" to 6" WC, Red, Plated Steel		655-697-003
	5" to 9" WC, Black, Plated Steel		655-697-004
	8.5" to 18" WC, White, Plated Steel		655-697-005
	14" to 28" WC, Green, Plated Steel		655-697-006
	.75 to 2 psig, Blue, Plated Steel		655-697-007
	Range Springs - High Pressure Version Only		
	1.5 to 3.25 psig, Orange, Chrome Silicon		655-697-008
	2 to 5 psig, Yellow, Chrome Silicon		655-730-000
5 to 10 psig, Blue Stripe, Chrome Silicon	655-659-004		
22	Range Spring Seat	1	650-171-000
	Upper Diaphragm Plates		
23	Upper Diaphragm Plate - Low Pressure	1	638-071-000
	Upper Diaphragm Plate - High Pressure		638-070-000
	Upper Diaphragms		
24	Upper Diaphragm - Nitrile	1	618-094-000
	Upper Diaphragm - Fluorocarbon		618-094-001
25	Diaphragm Sealing Plate	1	638-072-000
26	Sealing Washer - Nitrile	2	662-231-000
	Sealing Washer - Fluorocarbon		662-231-001
27	Stem - 416 Stainless Steel	1	689-007-000
28	O-ring - Nitrile	2	649-000-197
	O-ring - Fluorocarbon		649-000-342
29	Upper Stem Hex Nut	1	634-196-000
30	Lower Diaphragm Plate	1	638-069-000
	Lower Diaphragms		
31	Nitrile Lower Diaphragm	1	600-511-000
	Fluorocarbon Lower Diaphragm		600-511-001
32	Washer	2	662-232-000
33	Stem Guide Bushing	1	608-082-000
34	Stem Sleeve	1	653-056-000
35	Stem E-ring	1	693-025-000
36	Roll Pin	1	635-071-000

Item	Description	Qty.	Part Number
37	Valve Disk Assembly - Nitrile	1	822-039-000
	Valve Disk Assembly - Fluorocarbon		822-039-001
38	Registration Disk	1	619-064-000
39	Washer	1	662-233-000
40	Lower Stem Hex Nut	1	634-000-031
41	Body O-ring - Nitrile	1	649-000-257
	Body O-ring - Fluorocarbon		649-318-000
42	Body/Lower Casing Studs (not shown)	4	657-016-000
43	Body/Lower Casing Lock Nut (not shown)	4	634-184-000
44	Lower Casing/Upper Casing Screw	12	648-506-000
45	Lower Casing/Upper Casing Nut	12	634-174-000
47	Set Screw (not shown)	2	648-534-000
48	Thrust Washer - High Pressure only	1	662-234-000
	Restrictor Collars		
49	25% Capacity Restrictor	1	612-009-000
	40% Capacity Restrictor		612-010-000
	60% Capacity Restrictor		612-011-000
50	Restrictor Collar Set Screw	1	648-535-000

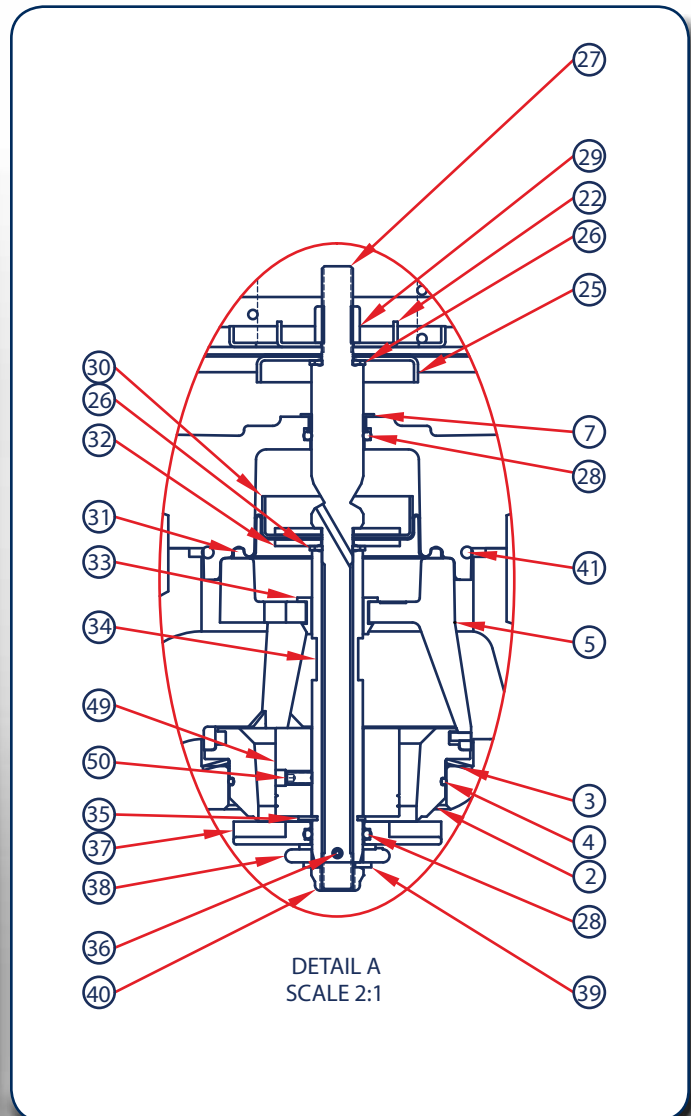

P133L Unrestricted Flow Capacities in Thousands of SCFH

(Nm³/h) of 0.6 Specific Gravity Natural Gas at 14.7 Psia and 60 °F

Inlet Pressure		Outlet Pressure Setting ⁽¹⁾ and Outlet Pressure Range											
		4 in. w.c. (10 mbar) 2 to 4 in. w.c. (5 to 10 mbar)	6 in. w.c. (15 mbar) 3.5 to 6 in. w.c. (8.7 to 15 mbar)	7 in. w.c. (17 mbar) 5 to 9 in. w.c. (12 to 22 mbar)	14 in. w.c. (35 mbar) 8.5 to 18 in. w.c. (21.2 to 44.8 mbar)	14 in. w.c. (35 mbar) 14 to 28 in. w.c. (35 to 70 mbar)	14 in. w.c. (35 mbar) 14 to 28 in. w.c. (35 to 70 mbar)	1 psig (0.07 bar) 14 to 28 in. w.c. (35 to 70 mbar)	2 psig (0.14 bar) 0.75 to 2 psig (0.05 to 0.14 bar)				
		1 in. w.c. (2.5 mbar) Droop SCFH (Nm ³ /h)	1 in. w.c. (2.5 mbar) Droop SCFH (Nm ³ /h)	1 in. w.c. (2.5 mbar) Droop SCFH (Nm ³ /h)	1 in. w.c. (2.5 mbar) Droop SCFH (Nm ³ /h)	2 in. w.c. (5 mbar) Droop SCFH (Nm ³ /h)	1 in. w.c. (2.5 mbar) Droop SCFH (Nm ³ /h)	2 in. w.c. (5 mbar) Droop SCFH (Nm ³ /h)	10% Droop SCFH (Nm ³ /h)	20% Droop SCFH (Nm ³ /h)	10% Droop SCFH (Nm ³ /h)	20% Droop SCFH (Nm ³ /h)	
1	0.07	14 (0.38)	13 (0.35)	12 (0.32)	5 (0.13)	8.4 (0.22)							
2	0.14	20.8 (0.56)	20 (0.54)	17 (0.46)	8.2 (0.22)	15.2 (0.41)			11.5 (0.31)	16 (0.43)			
3	0.21	26 (0.70)	24.5 (0.66)	21 (0.56)	12 (0.32)	19.5 (0.52)			15.5 (0.42)	21.5 (0.58)	12.5 (0.34)	18.5 (0.50)	
5	0.34	35 (0.94)	33 (0.88)	32 (0.86)	16 (0.43)	28 (0.75)	14 (0.38)	23 (0.62)	24 (0.64)	31.5 (0.84)	20.5 (0.55)	28 (0.75)	
10	0.69	52 (1.39)	52 (1.39)	48 (1.29)	34 (0.91)	45 (1.21)	26 (0.70)	38 (1.02)	37.5 (1.00)	44 (1.18)	38 (1.02)	46 (1.29)	
20	1.38	78 (2.09)	77 (2.06)	79 (2.12)	69 (1.85)	76 (2.04)	60 (1.61)	69 (1.85)	70 (1.88)	77 (2.06)	62 (1.66)	76 (2.04)	
30	2.07	101 (2.7)	100 (2.68)	100 (2.68)	91 (2.44)	97 (2.60)	87 (2.33)	93 (2.49)	90 (2.41)	101 (2.71)	87 (2.33)	101 (2.71)	
40	2.76	124 (3.32)	122 (3.27)	124 (3.32)	109 (2.92)	116 (3.11)	107 (2.87)	115 (3.08)	110 (2.95)	122 (3.27)	105 (2.81)	121 (3.24)	
50	3.45	146 (3.91)	144 (3.86)	145 (3.89)	130 (3.48)	136 (3.64)	132 (3.54)	137 (3.67)	127 (3.40)	145 (3.89)	124 (3.32)	145 (3.89)	
60	4.14	170 (4.56)	168 (4.50)	166 (4.45)	155 (4.15)	161 (4.32)	152 (4.07)	158 (4.23)	149 (3.99)	167 (4.48)	145 (3.89)	170 (4.56)	

1. Outlet pressure setting was made at approximately 10% of the maximum capacity for the listed conditions.



P133H Unrestricted Flow Capacities in Thousands of SCFH

(Nm³/h) of 0.6 Specific Gravity Natural Gas at 14.7 Psia and 60 °F

Inlet Pressure		Outlet Pressure Setting ⁽¹⁾ and Outlet Pressure Range									
		3 psig (0.21 bar) 1.5 to 3 psig (0.10 to 0.21 mbar)		2 psig (0.14 bar) 2 to 5 psig (0.14 to 0.34 mbar)		5 psig (0.34 bar) 2 to 5 psig (0.14 to 0.34 mbar)		5 psig (0.34 bar) 5 to 10 psig (0.34 to 0.69 mbar)		10 psig (0.69 bar) 5 to 10 psig (0.34 to 0.69 mbar)	
		10% Droop SCFH (Nm ³ /h)	20% Droop SCFH (Nm ³ /h)	10% Droop SCFH (Nm ³ /h)	20% Droop SCFH (Nm ³ /h)	10% Droop SCFH (Nm ³ /h)	20% Droop SCFH (Nm ³ /h)	10% Droop SCFH (Nm ³ /h)	20% Droop SCFH (Nm ³ /h)	10% Droop SCFH (Nm ³ /h)	20% Droop SCFH (Nm ³ /h)
3	0.21			6.5 (0.17)	11.5 (0.31)						
5	0.34	14 (0.38)	22 (0.59)	11 (0.30)	18 (0.48)						
7	0.48	21.5 (0.58)	31 (0.83)	13 (0.35)	22 (0.59)	15.5 (0.42)	24 (0.64)	9 (0.24)	15 (0.40)		
10	0.69	28 (0.75)	42 (1.13)	15 (0.40)	27 (0.72)	24 (0.64)	35 (0.94)	14 (0.38)	22 (0.59)		
15	1.03	40 (1.07)	57 (1.53)	25.5 (0.68)	39 (1.04)	35 (0.94)	51 (1.37)	19 (0.51)	31.5 (0.84)	21 (0.56)	35 (0.94)
20	1.38	52 (1.39)	72 (1.93)	35 (0.94)	52 (1.39)	46 (1.23)	67 (1.80)	24 (0.64)	41 (1.10)	31 (0.83)	51 (1.37)
30	2.07	76 (2.04)	96 (2.57)	49 (1.31)	73 (1.96)	68 (1.82)	95 (2.55)	35 (0.94)	58 (1.55)	44 (1.18)	74 (1.98)
40	2.76	98 (2.63)	119 (3.19)	66 (1.77)	97 (2.60)	88 (2.36)	117 (3.14)	44 (1.18)	73 (1.96)	56 (1.50)	97 (2.60)
50	3.44	118 (3.16)	141 (3.78)	84 (2.25)	112 (3.00)	103 (2.76)	138 (3.70)	57 (1.53)	89 (2.38)	74 (1.98)	117 (3.14)
60	4.14	136 (3.64)	165 (4.42)	104 (2.79)	132 (3.54)	122 (3.27)	156 (4.18)	65 (1.74)	106 (2.84)	91 (2.44)	136 (3.64)

1. Outlet pressure setting was made at approximately 10% of the maximum capacity for the listed conditions.

P133H Flow Capacities in Thousands of SCFH

(Nm³/h) of 0.6 Specific Gravity Natural Gas at 14.7 Psia and 60 °F

Inlet Pressure		Outlet Pressure Setting ⁽¹⁾ and Outlet Pressure Range											
		25% Capacity				40% Capacity				60% Capacity			
		5 psig (0.34 bar) 2 to 5 psig (0.14 to 0.34 mbar)		10 psig (0.69 bar) 5 to 10 psig (0.34 to 0.69 mbar)		5 psig (0.34 bar) 2 to 5 psig (0.14 to 0.34 mbar)		10 psig (0.69 bar) 5 to 10 psig (0.34 to 0.69 mbar)		5 psig (0.34 bar) 2 to 5 psig (0.14 to 0.34 mbar)		10 psig (0.69 bar) 5 to 10 psig (0.34 to 0.69 mbar)	
10% Droop SCFH (Nm ³ /h)	20% Droop SCFH (Nm ³ /h)	10% Droop SCFH (Nm ³ /h)	20% Droop SCFH (Nm ³ /h)	10% Droop SCFH (Nm ³ /h)	20% Droop SCFH (Nm ³ /h)	10% Droop SCFH (Nm ³ /h)	20% Droop SCFH (Nm ³ /h)	10% Droop SCFH (Nm ³ /h)	20% Droop SCFH (Nm ³ /h)	10% Droop SCFH (Nm ³ /h)	20% Droop SCFH (Nm ³ /h)		
7	0.48	8.0 (0.21)	9.0 (0.24)			11.0 (0.0)	15.0 (0.40)			13.0 (0.35)	17.0 (0.46)		
10	0.69	12.3 (0.33)	13.0 (0.35)			16.5 (0.44)	20.0 (0.54)			20.0 (0.54)	25.0 (0.67)		
15	1.03			13.0 (0.35)	15.5 (0.42)			16.5 (0.44)	23.5 (0.63)			20.0 (0.54)	29.5 (0.79)
20	1.38	20.8 (0.56)	21.2 (0.57)	17.5 (0.47)	20.0 (0.54)	31.5 (0.84)	33.5 (0.90)	23.5 (0.63)	30.5 (0.82)	36.0 (0.96)	46.5 (1.25)	29.0 (0.78)	39.5 (1.06)
40	2.76	33.5 (0.90)	33.5 (0.90)	33.0 (0.88)	33.5 (0.90)	52.0 (1.39)	53.2 (1.43)	46.0 (1.23)	53.2 (1.43)	70.0 (1.88)	77.5 (2.08)	57.0 (1.53)	74.5 (2.00)
60	4.14	45.5 (1.22)	45.5 (1.22)	45.5 (1.22)	45.5 (1.22)	72.7 (1.95)	72.7 (1.95)	67.0 (1.80)	72.7 (1.95)	105.0 (2.81)	107.0 (2.87)	87.0 (2.33)	107 (2.87)

1. Outlet pressure setting was made at approximately 10% of the maximum capacity for the listed conditions.

USA

Marsh Bellofram
 8019 Ohio River Blvd
 Newell, WV 26050 USA
 (304) 387-1200
 1-800-727-5646
 Fax: 1-304-387-1212
info@marshbellofram.com

EUROPE

Marsh Bellofram Europe
 9 Castle Park, Queens Drive
 Nottingham NG2 1AH, UK
 + 44 (0) 115993 3300
 Fax: + 44 (0) 115993 3301
bellofram@aol.com

CHINA

Marsh Bellofram Trading
 (Shanghai) Co. Ltd.
 Rm 403, Fangzheng Building,
 No. 1122 Xin Jinqiao Rd.,
 Shanghai, China P.C. 201206
 Tel: + 86-21-50327751
 Fax: + 86-21-50327753
info@marshbellofram.cn

INDIA

Bellofram Instruments
 (India) Pvt. Ltd.
 Survey No. 83, 2/3, Old NDR Rd.
 At Post: Shivane, Taluka- Haveli
 Dist. Pune 411023 India
 Ph: 0091 20 64701076
mb_india@marshbellofram.com

P133 __ 2_22_2012.PDF.CW

belgas.net

The screenshot shows the BelGAS website interface. At the top left is the BelGAS logo. Below it is a navigation menu with links for 'Products', 'Distributors', 'Request a Catalog', 'Contacts', and 'Terms and Conditions'. The 'Products' menu is expanded, listing categories such as High Pressure Gas Regulators, General Purpose Gas Regulators, Back Pressure Regulators / Relief Valves, Air Gas Regulator Systems / Manifolds / Instrument, Industrial Regulators, Electronic Products, Gauge Thermometers/Thermowells, and Needle Valves. The main content area features a paragraph describing the company's products and a photograph of several different types of gas regulators and instruments.