

Flanged End Connection


Series C

Carbon Steel

- Swing Check Valve
- ANSI Class 300 (740 PSI WP)
- 2" Through 6"
- Bolted Body Construction




- Replaceable Seat Disc Cartridge
- Seal Located in Seat, Thus Protected From Flow
- NACE Standard
- Stainless Steel Disc and Seat Standard

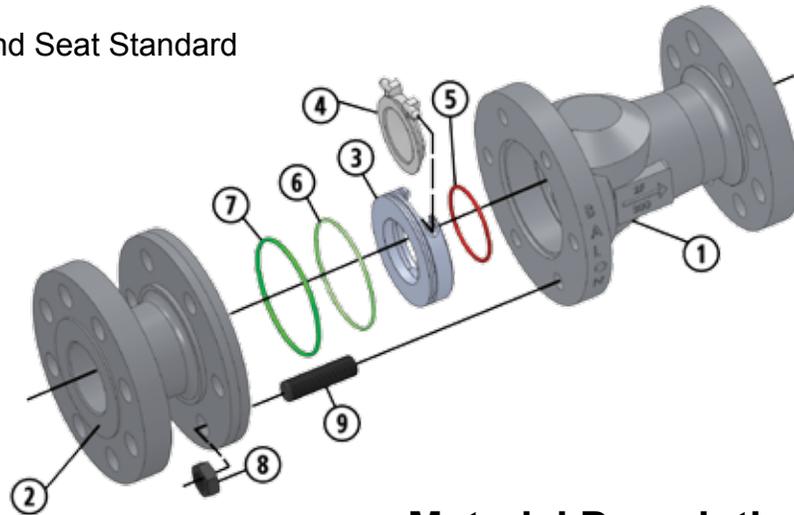

Material Description

| ITEM | PART NAME | DESCRIPTION |
|------|------------|---------------------------------|
| 1 | Body | ASTM A216 WCB |
| 2 | Adapter | ASTM A216 WCB |
| 3 | Seat | Replaceable 316 Stainless Steel |
| 4 | Disc | Replaceable 316 Stainless Steel |
| 5 | O-Ring | Seat Seal: Fluorocarbon |
| 6 | O-Ring | Assembly Seal: Fluorocarbon |
| 7 | O-Ring | Body Seal: Fluorocarbon |
| 8 | Nuts | ASTM A194 2HM |
| 9 | Body Bolts | ASTM A193 B7M |

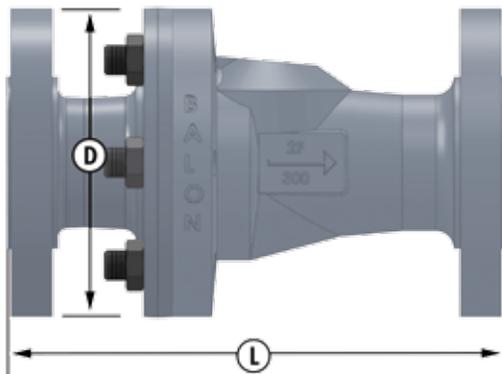

Dimensional Data

| SIZE | CATALOG | PORT | D | L | LBS. |
|------|------------|------|-------|------|------|
| 2 | 2F-C33S-RF | 2 | 6.50 | 10.5 | 37 |
| 3 | 3F-C33S-RF | 3 | 8 | 12.5 | 74 |
| 4 | 4F-C33S-RF | 4 | 9.37 | 14 | 111 |
| 6 | 6F-C33S-RF | 6 | 13.25 | 17.5 | 268 |